




01-2015



UNI - ISO - DIN -

GHIERE AUTOBLOCCANTI DI TIPO NORMALE CON INSERTO IN NYLON

SLOTTED ROUND NUT FOR HOOK – SPANNER WITH NYLON INSERT

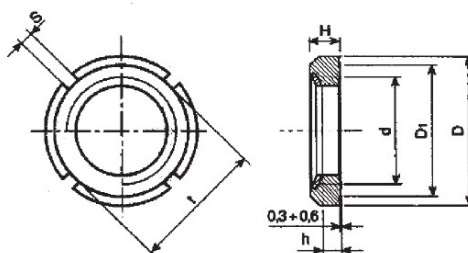

Dimensioni in mm

Tipo	d x passo	D	D 1=t	H	h	S	n° cave
KMA 0	M 10x0,75	18	15	7,4	4,5	3	4
KMA 1	M 12x1	21	18	7,4	4,5	3	4
KMA 2	M 15x1	24	21	8,4	5,5	4	4
KMA 3	M 17x1	28	24	8,4	5,5	4	4
KMA 4	M 20x1	32	27	9,4	6,5	4	4
KMA 5	M 25x1,5	38	33	10,3	6,5	5	4
KMA 6	M 30x1,5	44	38	10,9	6,5	5	4
KMA 7	M 35x1,5	50	44	11,1	7	5	4
KMA 8	M 40x1,5	56	50	12,1	8,2	6	4
KMA 9	M 45x1,5	62	55	12,1	8,2	6	4
KMA 10	M 50x1,5	68	61	12,7	8,5	6	4
KMA 11	M 55x2	75	68	13,2	8,5	7	6
KMA 12	M 60x2	80	73	13,2	8,5	7	6
KMA 13	M 65x2	85	77	14,3	9,5	7	6
KMA 14	M 70x2	92	84	14,3	9,5	8	6
KMA 15	M 75x2	98	89	15,3	10,5	8	6
KMA 16	M 80x2	106	96	16,3	11,5	8	8
KMA 17	M 85x2	110	100	17,3	12,5	8	8
KMA 18	M 90x2	120	110	17,5	12,5	10	8
KMA 19	M 95x2	125	115	18,5	13,5	10	8
KMA 20	M 100x 2	130	120	19,5	14,5	10	8